


Rockpave

Suitable for:



Overlay to Asphalt

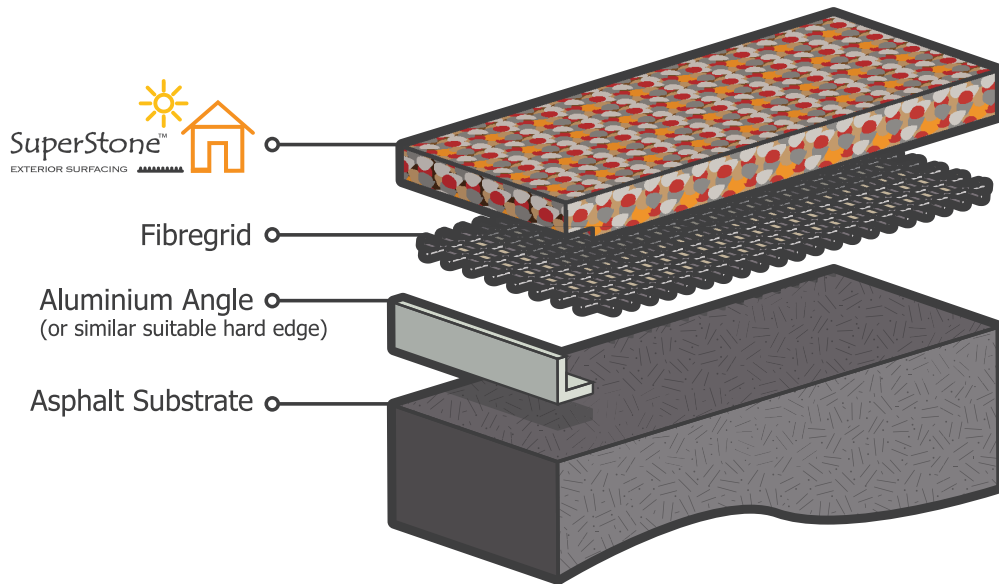


Note:

Overlay may require a key in channel to remain flush with adjacent pavements. See Specification Advice for "Key in Channels" for details.

Overlay to Timber Floors

Suitable for:

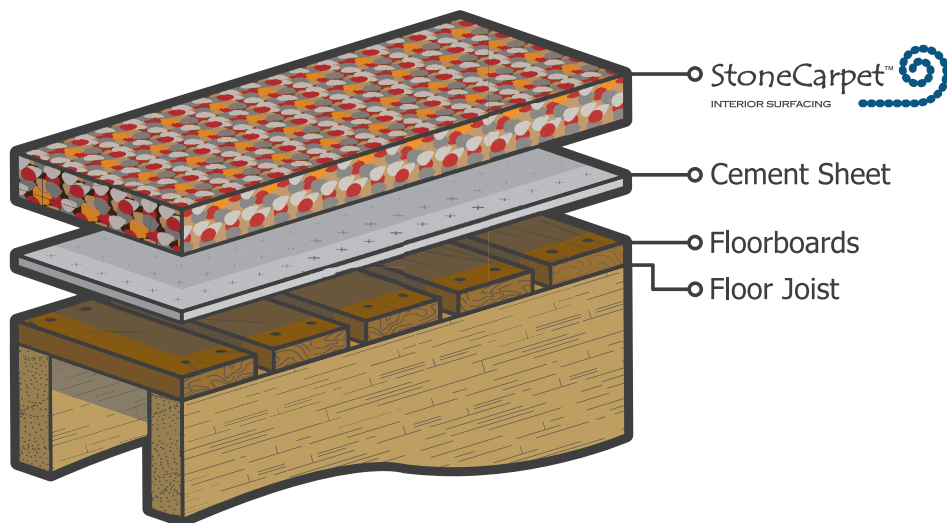

Note:

All cement sheet overlays will require priming with Rockseal primer before applying Rockpave Systems. A suitable waterproofing membrane should also be applied where an impermeable surface is required.

The specification detailed and illustrated above is a recommended guide only and is based on best normal practice for flexible surfacing overlays. It does not absolve the specifier from designing a construction suitable for the expected traffic and ground conditioning pertaining on a given site. The end user will require to assess whether the substrate or the wearing course are suitable for use in the intended purpose.



79-81 Intrepid St
Berwick Victoria 3806
www.mpspaving.com.au
P: +61 3 9769 4077
F: +61 3 9707 0088
info@mpspaving.com.au

Rockpave Overlay to Asphalt_v2.1 revised Jan 2012